


## DI/ML COOKER SERIES DOOR REMOVAL AND INSTALLATION INSTRUCTIONS

The new DI and ML series of Glem and Emilia cookers have the latest oven door hinge design technology from Glem Gas. For the removal and re-installation of the oven door with the new hinges please follow these procedures.


### STEP 1 OPEN THE DOOR FULLY




### STEP 2. LOCK THE TWO HINGES



Using your finger or a screw driver rotate the locking bracket




Hinge in normal position




Hinge in locked position

### STEP 3. REMOVE THE DOOR

The door removal has to be done with the door open at an angle where there is 150mm gap at the top. **THIS IS IMPORTANT**



1. Using a kneeling position grip the door as shown  
DO NOT pull on the handle

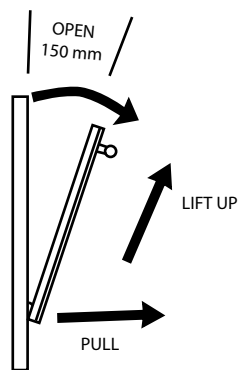

2. Close the door slightly until there is a gap at the top of 150 mm. **THIS IS IMPORTANT**
3. Lift the door in the direction of the arrow
4. Pull the door away from the cooker towards you in the direction of the arrow. The most pull should be at the lower part of the door. One side may release first, do not force the door.

### TO RE-INSTALL THE DOOR

NOTE - ONCE YOU HAVE INSTALLED THE DOOR IF IT DOES NOT OPEN PROPERLY REPEAT THE PROCEDURE. DO NOT FORCE THE DOOR AT ANY TIME.

**IMPORTANT** Hold the door at an angle so there is a 150mm gap at the top.

Hook the hinges in first with the groove in the bottom of the hinge sitting on the roller housing.

Once the hinges are located properly fully open the door again and unlock the hinges and close the door.

**IF THE DOOR DOES NOT OPEN FULLY AFTER THEN THE HINGES HAVE NOT BEEN LOCATED**